



Great Features!

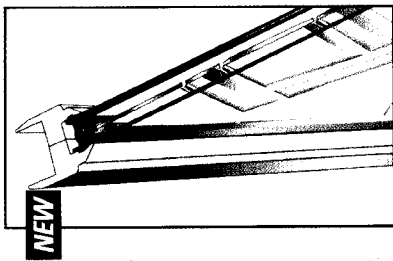

More Durable

- ▶ Heavy, 24 gauge galvanized steel construction resists rusting and will not warp, crack or split like wood doors.
- ▶ Life frames are paintable or stainable and resist discoloration and warping. Can be used with storm doors.
- ▶ Full mortise hinges prevent door from sagging.
- ▶ Double primed white jambs and brickmold.



More Secure

- ▶ 12" lock block reinforces lockset and deadbolt.
- ▶ 1.2" thick stiles and rails provide structural strength. Steel skins lock securely into grooved stiles.
- ▶ Jamb guard security plate resists forced entry.
- ▶ Impact resistant laminated glass adds to the overall security of the door.

Door Systems

New Construction Rough Opening Dimensions — Swing-In Doors

Door Size	Opening Type	WOOD FRAME UNIT		DOOR WITH 14" SIDELITE ²	
		Width	Height ¹	Single	Double
Single Door 30" x 80"	Rough Opening	2' 8-1/4"	6' 10"	3' 11-3/4"	5' 3-3/4"
	Brick Dimensions ³	2' 10"	6' 10-3/4"	4' 1-1/2"	5' 5"
Single Door 32" x 80"	Rough Opening	2' 10-1/4"	6' 10"	4' 1-3/4"	5' 5-1/4"
	Brick Dimensions ³	3' 0"	6' 10-3/4"	4' 3-1/2"	5' 7"
Single Door 36" x 80"	Rough Opening	3' 2-1/4"	6' 10"	4' 5-3/4"	5' 9-1/4"
	Brick Dimensions ³	3' 4"	6' 10-3/4"	4' 7-1/2"	5' 11"
Single Door 42" x 80"	Rough Opening	3' 8-1/4"	6' 10"	4' 11-3/4"	6' 3-1/4"
	Brick Dimensions ³	3' 10"	6' 10-3/4"	5' 1-1/2"	6' 5"
Double Door 60" x 80"	Rough Opening	5' 2-3/4"	6' 10"	6' 6-1/4"	7' 9-3/4"
	Brick Dimensions ³	5' 4-1/4"	6' 10-3/4"	6' 8"	7' 11-1/2"
Double Door 64" x 80"	Rough Opening	5' 6-3/4"	6' 10"	6' 10-1/4"	8' 1-3/4"
	Brick Dimensions ³	5' 8-1/2"	6' 10-3/4"	7' 0"	8' 3-1/2"
Double Door 72" x 80"	Rough Opening	6' 2-3/4"	6' 10"	7' 6-1/4"	8' 9-3/4"
	Brick Dimensions ³	6' 4-1/2"	6' 10-3/4"	7' 8"	8' 11-1/2"
Sidelite Only 14"	Rough Opening	—	6' 10"	1' 4-1/4"	—
	Brick Dimensions ³	—	6' 10-3/4"	1' 6"	—

Brick mold dimensions shown are for swing-in doors. For swing-out doors the dimensions must be adjusted accordingly. For swing-out doors only, add 3/4" to brick dimension width. For swing-out doors with one sidelite add 3/8" to brick dimension width. For swing-out doors with two sidelites use the dimensions on the chart. For swing-out doors utilizing bumper sills, subtract 7/8" from overall height of the opening.

¹ This door system has a 1-1/4" threshold height which allows for approximately a 1" opening clearance over carpet, tile or other floor coverings. If this clearance is not sufficient, the complete door system should be installed on a wood spacer high enough to ensure swing clearance. If a spacer is used, the rough opening height must be adjusted accordingly.

² If using 12" sidelites, subtract 2" from the opening width for a single sidelite, and subtract 4" for double sidelites.

³ Brick mold dimension is measured from outside edge of brick mold on door unit.

On doors with sidelites, a 2" x 4" stud between the door frame and sidelite frame assembly may be used. Add 1-1/2" to the rough opening width for units with single sidelites and 3" for units with double sidelites.

Stanley reserves the right to make changes at any time, in design, materials, specifications or discontinue products without notice.

All Stanley Door Systems are manufactured using quality branded Stanley components. Use of other than Stanley branded products or components may void warranty.

PERFORMANCE AND ACCEPTANCE DATA

Air Infiltration:

ASTM E 283

ANSI / I/SDSI - 101

Specification: 0.20 cfm/ft.

Tested to: 0.004cfm/ft. @15mph

0.005cfm/ft. @25mph

Water Infiltration:

ASTM E 331

ANSI / I/SDSI - 104

Specification: Zero penetration with 2.86 psi @5.00 gph/ft

Tested to: Zero penetration

Acoustical performance:

ASTM E413-70T - STC ≥ 23

Energy Saving Index: NFRC Certified (Test data available on request)

20 minute fire door: Smoke-Draft Door 1/3 HR UBC 43-2, 1/2" Latch Bolt Throw

Southwest Research Institute No. 92038-01-01. Test data available upon request.


Finishing instructions included with door.

Ascot, Delaney, Iris, Lehigh, Viola are registered trademarks.


Select the decorative glass style that's perfect for your home.

Make the ultimate statement by combining a quality Stanley entry door with beautiful decorative glass. Add a matching transom and sidelites to give your home a distinctive look both inside and out.


Five decorative glass collections to choose from.

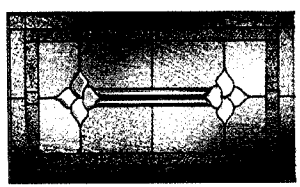


Iris

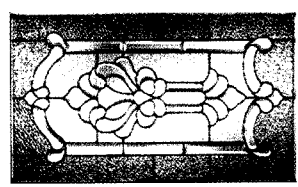


Delaney

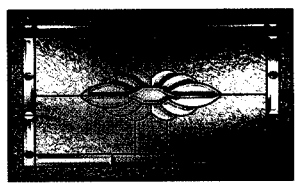

Ascot

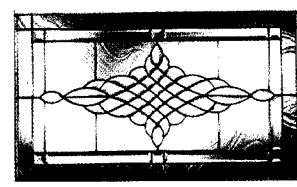

Viola

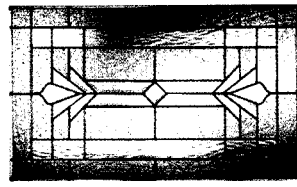

Lehigh